

EAN CODE : 3760244880062

POWERFUL

ALR3220

1 output  
Powerfull

- VISUAL SOFT-TOUCH CONNECTED** : Large graphic display  
: Sensitiv keypad  
: USB, RS232, RS485, (LAN option\*) & 0-10 V isolated LabVIEW™ drivers and executable provided
- PERFORMANCE FUNCTIONS** : output in the rear-panel, used for remote-sensing  
: Arbitrary, square, positive and negative ramp, rise or fall time
- ELEGANT SPACE-SAVING PRACTICAL** : New design and feathery  
: vertical & COMPACT BOX / 640 W  
: Lightweight with built-in handle and cord storage area.
- QUIET LOCKING** : Silent temperature-controlled fan cooling.  
: configuration & stand-by



\*OPTION : RSETHER

640 WATTS


(LAN)\*  
LabVIEW™

0 - 32 V 0 - 20 A

LabVIEW™



ULTRA-COMPACT

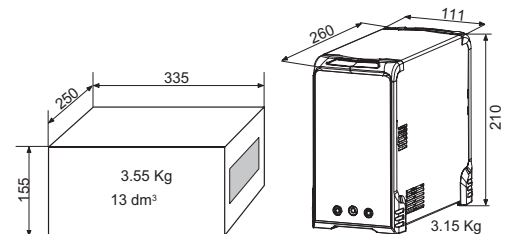

## Specifications

### Voltage

- Floating outputs : on 4 mm safety terminals in the front-panel, and on screw terminal block for 2.5 mm<sup>2</sup> on the rear-panel.
- Automatic constant voltage operation.
- Adjustable from 0 to 32.00 Volts (0 to ±10 mV) ; resolution : 10 mV.
- Setting accuracy : 0,03% + 10 mV.
- Regulation : < 50 mV for a load change from 10 to 90%.  
< 1 mV for a ±10% line change.
- Ripple : < 1 mV rms including :  
< 3 mV peak to peak of noise (BP 20 MHz)  
< 15 mV peak to peak of switching spikes
- Internal resistance : < 4 mΩ.
- Display : 4 digits on graphic LCD.
- Accuracy measurement : 0,03% + 10 mV.

### Current

- Automatic constant current operation.
- Adjustable from 0 to 20.00 Amps ; resolution : 10 mA.
- Setting accuracy : 0,05% + 10 mA.
- Regulation : < 10 mA for a load charge from 10 to 90%.  
< 1 mA for a ±10% line charge.
- Ondulation : < 6 mA peak to peak or 2 mA rms.
- Display : 4 digits on graphic LCD.
- Accuracy measurement : 0,05% + 10 mA.

### Protections

- Against short-circuits, by current regulation.
- Against overtemperature by fan and thermal circuit-breaker.
- Against overcurrent on main input, by internal fuses.

### Various and functions

- Display : Graphic LCD 128 x 64 pixels with white backlight.  
Visualization of all parameters  
CV (Constant Voltage) mode or CC (Constant Current)
- Memories : 16 including 15 configurable.

- OVP/OCP : Against overvoltage and overcurrent, adjustable from 0 to maxi.
- Functions : 6 available on U or I  
(Arbitrary, square, rising and falling periodically ramp, rise or fall time single shot).  
Time adjustment from 10 ms to 60 mn.
- Remote sensing : automatic function on the front side output.  
4 wires mode on the back-side's terminal blocks.  
Correction of the voltage drop in the wires : 2 V
- Standby : output, enable / disabled and standby of the power supply.

### Interfaces

All the interfaces are insulated of the output (150 VDC max).

- USB, RS232 and RS485 as a standard.
- \*ETHERNET option : RS232 / RS485 / RS422 adapter kit to ETHERNET.
- LabVIEW™'s drivers as a standard.
- Controller 0 - 10 V : for U and I by direct input 0 - 10 V  
or potentiometer or adjustable resistance 10 kΩ.  
In the back side on disconnect scribe terminal blocks.

### Other specifications

- Safety : Class I, enhanced safety between mains input and outputs.  
Complies with EN 61010-1, CAT II.
- CEM : Complies with EN 61326-1 and EN 55011.
- Input voltage : 220 - 240 Volts ±10%, 50/60Hz.
- Mains input : Socket CE14 with C13, 2 poles + earth cable removable
- Power consumption : 770 W maxi.
- Efficiency : > 84% of the maxi powerful.
- Operating temperature : +5 to +40 °C.
- Coefficient of temperature /°C : 0.01% for the voltage ; 0.05% for the current.
- Voltage on the earth : 150 VDC Max.
- Presentation : Front-panel with sensitiv keypad, rear-panel with handle and cord storage area, metallic case with epoxy finish.